

**7000
SERIES**

**35kV HIGH VOLTAGE
POWER SUPPLY**

GENVOLT HIGH VOLTAGE POWER SUPPLIES



High Voltage PSU

- ✓ Electrospinning, Testing, Electrophoresis
- ✓ Models From 500V To 35kV
- ✓ 30W or 60W Units
- ✓ Small Footprint
- ✓ Positive or Negative Polarity Available

[See 7000 Series On Website](#)

We recommend visiting our website for any updated model information

Specification Summary

The 7XX30 range of high voltage power supplies are used primarily as laboratory power supplies. The power supply has an LED digital voltage reading, adjustable voltage range, highly stable output and low ripple. The unit is available in positive or negative polarity and one or two output connectors depending on customer requirements. Both AC and DC input units are supplied with HV output cables. AC input unit is also supplied with IEC connector and cable, and DC input unit is supplied with 24V 5 way XLR connector (female).

Input Specifications

DC Input Voltage Range	22 - 26 Vdc
AC Input Voltage Range	85 - 260 Vac
DC Input Current	2.5A maximum. At full power and minimum input voltage
Efficiency at Full Load	More than 70%


Technical Specifications

Voltage Line Regulation	Less than 0.3% for an input changing from maximum input to minimum input.
Voltage Ripple	Less than 0.01% (peak to peak) of maximum output voltage.
Voltage Stability	Less than 0.05% for 8 hours per day with 30 mins warm-up.
Temperature Coefficient	Less than 200ppm/°C over the specified temperature.

Reliability & Quality Control

Each power supply has been soak tested with full load at 40°C for no less than 24 hours.

Model Number Coding

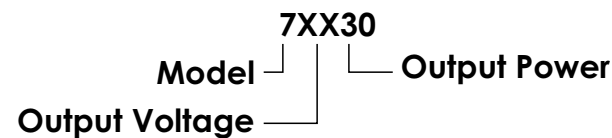

30W Output Specifications

	70130	70230	71030	72030	73030	73530
Output Voltage Range*	0-1kV	0-2kV	0-10kV	0-20kV	0-30kV	0-35kV
Maximum Output Current	30mA	15mA	3.0mA	1.5mA	1.0mA	0.85mA
Output Power	0 - 30W					
Output Polarity	Positive or Negative With Respective to Ground					
Voltage Load Regulation	Less than 0.01% for a load changing from no load to full load					

60W Output Specifications

	70160	70260	71060	72060	73060	73560
Output Voltage Range*	0-1kV	0-2kV	0-10kV	0-20kV	0-30kV	0-35kV
Maximum Output Current	60mA	30mA	6.0mA	3.0mA	2.0mA	1.7mA
Output Power	0 - 60W					
Output Polarity	Positive or Negative With Respective to Ground					
Voltage Load Regulation	Less than 0.01% for a load changing from no load to full load					

*For other output voltages please contact us.

Circuit Protection

- Overload, arcing and short circuit
- Unit enters constant current mode when fault occurs
- DC input unit protected against reverse polarity from power supply

Options

- Remote interlock available on DC input version
- Dual HV output sockets
- Dual meters
- Mounting bars

Please specify when ordering. For further information please contact us.




Head Office: Genvolt Ltd, New Road, Highley, Bridgnorth, Shropshire, WV16 6NN, UK.

T: +44(0)1746 862555 E: info@genvolt.co.uk W: www.genvolt.com


Registered in England and Wales No. 8087238

Front Controls

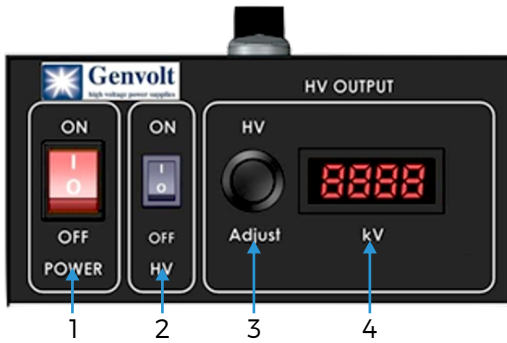


1. Power main switch. This switch controls the input of the entire power supply. Please ensure equipment is turned off during maintenance.
2. High voltage switch. This switch controls the high voltage function.
3. High voltage adjust. 10-turn potentiometer for adjusting output voltage.
4. kV. Digital display for output voltage.

Rear Controls

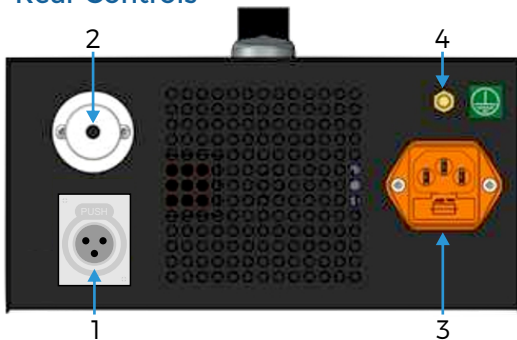

1. Remote HV enable.
2. High voltage output connector.
3. Input connector: available in both DC 5 way connector or AC standard IEC connector.
4. M6 for earth bonding.

Dimensions

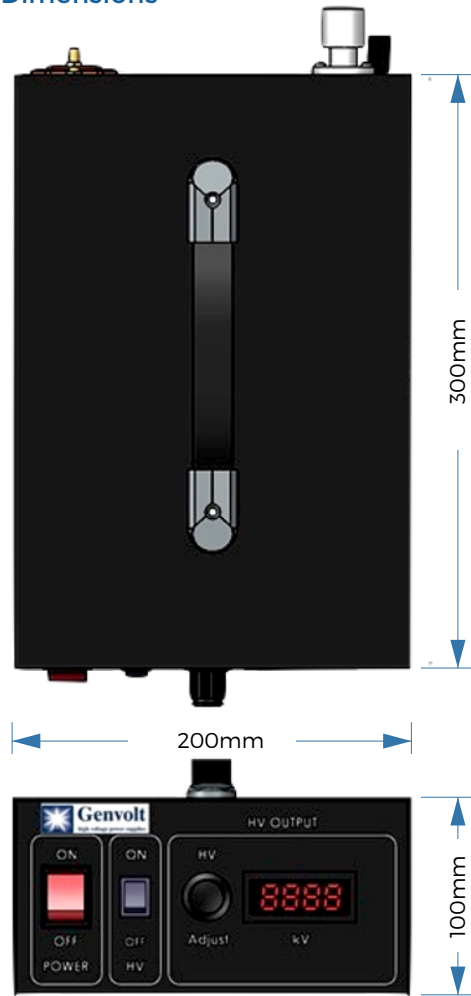

Remote Interlock & Switch



The remote enable connection is by means of a 3 pole TiniQ connector: with mating half supplied.

- Pin 1 = Enable
- Pin 2 = Ground
- Pin 3 = Not Used

Short Pin 1 to Pin 2 to enable the HV output.

The remote enable must be a voltage free contact.

Safety

- This power supply contains hazardous voltages and stored energy. Contact with the output may result in fatal injury. It should only be used and maintained by trained personnel.
- The area where the power supply is to be used should be kept clean and dry.
- Before switching the power supply on please confirm that the 10-turn potentiometer is turned fully in a counter-clockwise direction.
- Keep a safe distance from the output connector and any items connected to it.
- Ensure that a secure connection is made between the Earth side of the load and the green and yellow Earth lead.

Environmental Details

Operating Temperature	0 to 40°C
Storage Temperature	-20 to 60°C
Humidity	0 to 90% non-condensing

Mechanical Details

Weight	DC Input: 2.8kg (6.17lbs) AC Input: 3.6kg (7.94lbs)
Dimensions	Width 200mm, Height 100mm, Depth 300mm
Power Input Connector	AC Input: Standard IEC Connector DC Input: 24V 5 way XLR Connector (male)
HV Output Connector	Genvolt 35kV HV Connector

For requirements other than those specified, please do not hesitate to contact us. Please note that design improvements may lead to specification changes.

Worldwide Locations



UK Office:

Genvolt, New Road, Bridgnorth, Shropshire, WV16 6NN, United Kingdom

Tel: +44 (0) 1746 862 555

Email: info@genvolt.co.uk Website: www.genvolt.com

India Office:

Genvolt India Private Limited

806, Suratwala Mark Plazzo, Hinjewadi Village, Hinjewadi, Pune, Maharashtra - 411057, India

Email: supportindia@genvolt.co.uk Website: www.genvolt.in

USA Office:

Genvolt Americas, Boston, Massachusetts, USA

Tel: 978-846-0506

Email: steve.hopkins@genvolt.com Website: www.genvolt.com

Research and Development:

Genvolt Ltd

New road, Bridgnorth, Shropshire, WV16 6NN

Boher High Voltage Power Supplies Ltd (Genvolt China)

No. 79 Yandangshan Road, Suyu District, Suqian City, Jiangsu, China