




C2178

30kV Single Core Silicone

CONSTRUCTION

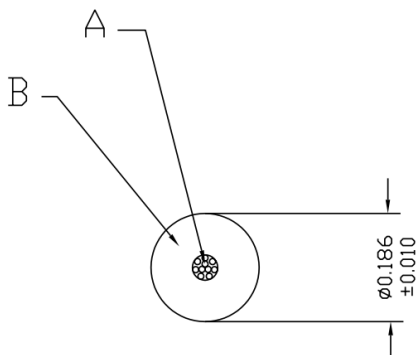

KEY

- A. #20 AWG (10/#30 AWG) TIN PLATED COPPER
- B. SILICONE RUBBER TO $\varnothing 0.186$



TECHNICAL INFORMATION

Part Number C2178		
Voltage	kV (DC)	30
	kV(AC)	10
Conductor Size	AWG	20
	mm ²	0.52
Dielectric Material		Silicone
Outside Diameter mm		4.7
Impedance (Ohms)		55
Capacitance (pf/m)		108
Min Bend Radius mm		10
Min Ambient Temp	°F	-85
	°C	-65
Max Conductor Temp	°F	300
	°C	149
Weight kg/m		0.03

GLOBAL PRESENCE



UK Office:

Genvolt, New Road, Bridgnorth, Shropshire, WV16 6NN, United Kingdom

Tel: +44 (0) 1746 862 555

Email: info@genvolt.co.uk Website: www.genvolt.com

India Office:

Genvolt India Private Limited

806, Suratwala Mark Plazzo, Hinjewadi Village, Hinjewadi, Pune, Maharashtra - 411057, India

Email: supportindia@genvolt.co.uk Website: www.genvolt.in

Research and Development:

Genvolt Ltd

New road, Bridgnorth, Shropshire, WV16 6NN

Factories:

Genvolt Ltd

New road, Bridgnorth, Shropshire, WV16 6NN

Boher High Voltage Power Supplies Ltd (Genvolt China)

No. 79 Yandangshan Road, Suyu District, Suqian City, Jiangsu, China