




C2202

15kV Single Core Silicone

CONSTRUCTION

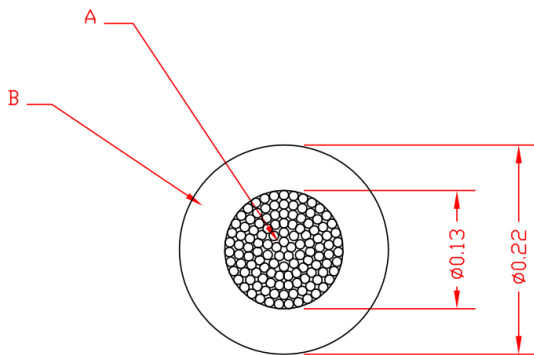

KEY

- A. #10 AWG (105x #30 AWG) TIN PLATED COPPER
- B. SILICONE RUBBER TO Ø0.22



TECHNICAL INFORMATION

Part Number C2202		
Voltage	kV (DC)	15
	kV (AC)	5
Conductor Size	AWG	10
	mm ²	5.26
Dielectric Material		Silicone
Outside Diameter mm		5.6
Impedance (Ohms)		19
Capacitance (pf/m)		312
Min Bend Radius mm		25
Min Ambient Temp	°F	-85
	°C	-65
Max Conductor Temp	°F	300
	°C	149
Weight kg/m		0.08

GLOBAL PRESENCE



UK Office:

Genvolt, New Road, Bridgnorth, Shropshire, WV16 6NN, United Kingdom

Tel: +44 (0) 1746 862 555

Email: info@genvolt.co.uk Website: www.genvolt.com

India Office:

Genvolt India Private Limited

806, Suratwala Mark Plazzo, Hinjewadi Village, Hinjewadi, Pune, Maharashtra - 411057, India

Email: supportindia@genvolt.co.uk Website: www.genvolt.in

Research and Development:

Genvolt Ltd

New road, Bridgnorth, Shropshire, WV16 6NN

Factories:

Genvolt Ltd

New road, Bridgnorth, Shropshire, WV16 6NN

Boher High Voltage Power Supplies Ltd (Genvolt China)

No. 79 Yandangshan Road, Suyu District, Suqian City, Jiangsu, China